

# STOCK FENCE

# HT13/190/15



**HT = HIGH TENSILE**

**13 = NUMBER OF LINE WIRES**

**190 = HEIGHT IN CM**

**15 = DISTANCE BETWEEN VERTICALS IN CM**

- Popular deer netting option. Ideal for enclosures, close containment and forest protection.
- High tensile offers extra strength, it can be strained tighter than mild steel and therefore requires less intermediate posts.
- Manufactured to BS EN 10223-5
- Galvanised to BS EN 10244-2 class A
- Tension curve to protect the fence.
- Hinge Joint.

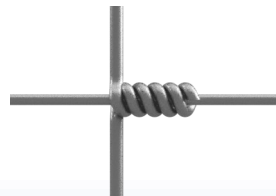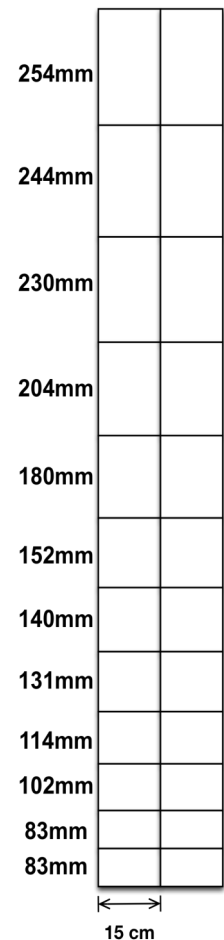

Top and bottom line wires	2.50mm-1235-1390 N/mm <sup>2</sup>
Intermediate line wires	2.50mm-1235-1390 N/mm <sup>2</sup>
Vertical wires	2.50mm 695-850 N/mm <sup>2</sup>
Roll lengths available	100m
Weight of 100m roll	111Kg